

IPM-SS1961

19-inch IP66 Waterproof Industrial LCD Monitor

Features

- 19" SXGA TFT LCD with Resolution up to 1280 x 1024
- IP66/NEMA4X Waterproof, Stainless Steel Housing
- 250nit / 1000nits High Brightness for Sunlight Readable (Optional)
- Optical Bonding to prevent Condensation at Front (Optional)

SPECIFICATION

Display	Size/Panel Type	19" SXGA Color TFT LCD Panel
	Resolution	1280 x 1024
	Brightness (cd/m ²)	250cd/m ² (1000cd/m ² Optional)
	Contrast Ratio	1000:1
	Response Time	5ms
	Backlight	LED Backlight Unit
	Colors	16.7M Colors
	Viewing Angle (H/V)	170°/160°
	Surface Hardness	7~8H, AR Glass
Touch Screen	Touch Screen Type	Resistive Touch / P-CAP (Optional)
	Surface Hardness	3H / 7H
Environment	Operating Temperature	0°C~50°C
	Storage Temperature	-20°C~+60°C
	Humidity	5%~95% RH(Non-Condensing)
	Waterproof Rating	IP66/NEMA4X, 6 Side Waterproof
System	OSD	Menu, Auto, On/Off, Up, Down
	I/O Interface	DVI x 1, VGA x 1, Power in x 1
	Power Input	12V DC (Optional: 9~36V DC Input)
	Power Consumption	38W
	Certification	FCC/CE/RoHS Compliance
	Mounting	VESA 75 x 75mm, 100 x 100mm, M4/depth:4.5mm
	Dimension/Weight	477.5mm (W) x 402mm (H) x 55mm (D)/12kgs

ORDERING CODE


Specifications subject to change without notice

IPM-SS1961	-RT -PT	-W	-HB	-OB
------------	------------	----	-----	-----

RT = Resistive Touch Screen
PT = Projected Capacitive Touch (P-CAP)
W = Wide Temperature, -30°~50°C
HB = 1000nit High Brightness
OB = Optical Bonding

ACCESSORIES

- DVI Cable x 1 (1.8M)
- VGA Cable x 1 (1.8M)
- Power Adapter x 1 (1.8M)

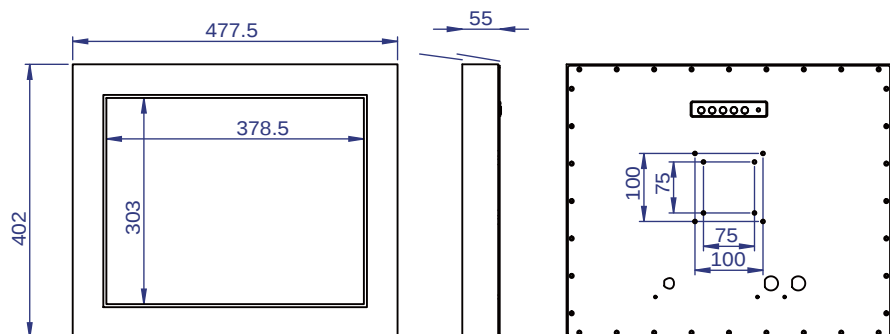

Unit: mm