


# Quad Screen Splitter LCD Console Drawer – Large Screen (pivot)

DVI-D, USB, Audio, Hub



(USB Port for device access)

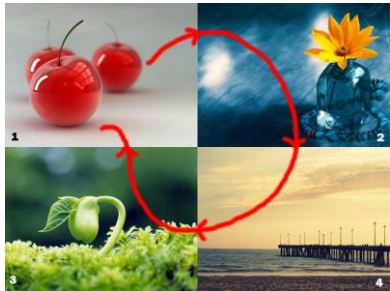

Switching port by simply moving the mouse cursor across each screen boundary on QSS mode

## Features

- Facilitated by screen rotate function.
- 1U single rail with 21.5 or 23.8" LCD Monitor,
- Support FHD with 1080p resolution.
- Four Independent DVI-D/USB/Audio/HUB interface for each PC.
- Support Full screen and Quad screen mode
- On Quad Screen mode, by Mouse moving across screen boundary or via Push Button or Hotkey to switching port
- Front 1x, rear 2x USB 2.0 Type A, Sharing USB peripheral Device for each computer. (Ex, flash disk, hard driver, KB/Mouse)
- Build in 2x2w stereo speakers.
- Durable 104-key keyboard and touch pad.
- Quick and simple installation.
- Self-locking and auto release rails for ultra convenience.

Rear of KVM-2104/2404QSS-M5



| Part No.  |                  | KVM-2104QSS-M5   | KVM-2404QSS-M5                              |
|---|------------------|--|---|
| Direct no. of Computers   |                  | 4 x DVI-D/ USB / Audio & 2x HUB  |   |
| Maximum no. of Computers  |                  | 4  |   |
| LCD   | Size             | 21.5"  | 23.8"                                       |
|   | Backlight        | LED  | LED   |
|   | Resolution       | 1920*1080 FULL HD (support up to 1920*1200)  | 1920*1080 FULL HD (support up to 1920*1200) |
|   | Max.color        | 16.7M  | 16.7M                                       |
|   | Luminance        | 250cd/m2   | 250cd/m2                                    |
|   | View Angel (H/V) | 178 / 178  | 178 / 178                                   |
|   | Contrast Ratio   | 3000 : 1   | 1000 : 1                                    |
| Port Selection  |                  | Mouse moving across screen boundary , Push Button or Hotkey  |   |
| USB HUB   |                  | Front 1 x , rear 2x USB 2.0 Type A for USB Peripheral Device   |   |
| KB/Mouse Emulation  |                  | USB  |   |
| Rack Depth  |                  | 600mm to 1300mm ( rack cabinet front rails to rear rails )   |   |
| Power   |                  | 100-240V AC 50/60Hz via IEC Type power cord  |   |
| Environment   |                  | Operation temp: 0 to 50℃<br>Storage temp: -20 to 60℃<br>Humidity: 10% - 90%, non-condensing<br>Shock: 10G acceleration ( 11ms duration)<br>Vibration: 17 to 500Hz 1G PTP |   |
| Physical Dimensions / Net Weights   |                  | 448x44x790mm (WxHxD) / 19.5KG  | 448x44x790mm (WxHxD) / 20KG                 |
| Packing Dimensions / Gross weights  |                  | 580 x 195 x 940mm (WxHxD) / 23KG   | 580 x 195 x 940mm (WxHxD) / 23.5KG          |
| Accessory   |                  |  |   |
| 1.8meter IEC Type Power Cord ,1.8meter DVI Cable x4 , 1.8meter USB Cable x 4 , 1.8meter Audio Cable x 4 |                  |  |   |

Specifications subject to change without notice

# Quad Screen Splitter LCD Console Drawer – Large Screen (pivot)

DVI-D, USB, Audio, Hub



Lift the display



Display rotate to the right



Operating position

Rear of KVM-2104/2404QSS-M5

