


# Keyboard Mouse (KM) Switch

Optimize rack space. Maximize rack monitoring



KM Switches are allowing you to seamlessly access up to four computers and their display screens, using a single USB keyboard and USB mouse. The operator can simply move the cursor across screen borders to instantly select the computer they need to control - a great saving in both time and desk space.

In addition, KM Switch can also share a set of speakers and two separate USB peripherals between the four systems. This can be done either in concert with the keyboard and mouse or totally independently.

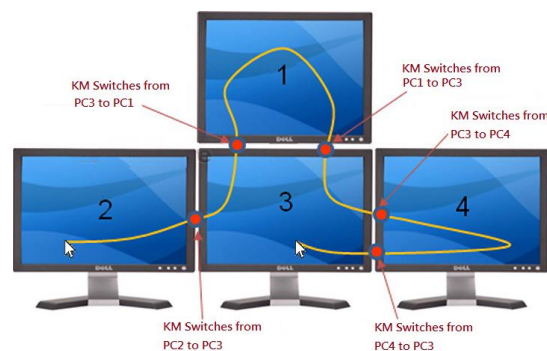

## Features

- Seamless cursor moving from one computer to another as crossing display borders
- Emulate USB peripherals device to each computer
- Plug and Play, driver self-installed
- Switching PC ports by buttons with independent LED indicator
- Switching audio source by independent button with separate LED indicator
- Switching USB HUB port by independent button with separate LED indicator
- Improved desk ergonomics

Part No.		KM-104
Host Ports	USB Type B	x 4
	Audio (3.5mm female)	X4
	Operating-System (OS)	Win XP / Win 7 (32/64-bit) / Win 8 (32/64 bit)
Console	KB/MS Console Ports (USB type –A)	keyboard x 1; mouse x 1
	Audio-Out port	1
Panel (audio)	Green LED's	4
	Audio freeze button	1
Panel (KB/MS)	Channel Selected LED Indication	4
	Port Selector Push Buttons	4
Panel (Hub)	Green LED's	4
	Hub connector / freeze button	1
Power	Aux DC-in	5V DC / 1A (Center-pin-positive polarity)
	Power Adapter	100 to 240 VAC, 50/60Hz
Environment	Operation/Storage Temp	0 to 50 / -20 to 60 degree C
	Humidity	0-80% RH, non-condensing
Mechanism	Dimension	220 x 110 x 32 mm

### Package

KM Switch x 1	5V Power adapter x 1	Quick Installation Guide x 1
---------------	----------------------	------------------------------

Specifications subject to change without notice

# Keyboard Mouse (KM) Switch

Optimize rack space. Maximize rack monitoring

